


Technical Data

Trailer Sweeper MSH 150

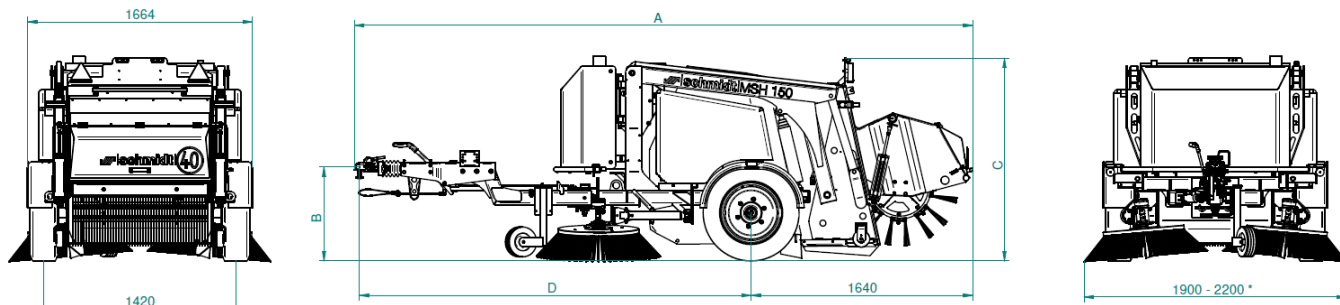

Variant	A [mm]	B [mm]	C [mm]	D [mm]
MSH 150 25 km/h	4420 – 4450**	500	1690	2740 – 2770**
MSH 150 40 km/h	4530 – 4580**	700	1530	2850 – 2990**
† Side brush adjustment range ** Dimension depending on the type of hitch				
Hopper				
Hopper volume approx.	1.5 m ³	Material		Steel
Tilting Height	1,800 mm			

Sweeping Unit			
Sweeping Width	1,900 – 2,200 mm	Disc brush	Ø 900 mm
Disc brush speed	Max. 160 1/min	Roller brush	Ø 860 mm L = 1,000 mm
Sweeping speed	Up to 12 km/h	Roller brush speed	Max. 200 1/min

Water System			
Water tank volume approx.	500 l	Material	Steel
Water pumps	2 spraying levels 7,5 l/min @ 3,4 bar	Amount spray nozzles	4

Hydraulic System			
Hydraulic oil volume approx.	50 l	Flow rate approx. (PTO 540 1/min)	30 l/min
System pressure	Max. 160 bar		

Weights

Voltage	12 V	
---------	------	--

Weights		
Empty weight approx.	1,300 – 1,750 kg	Gross vehicle weight 3,000 kg
Max. mass on the drawbar	300 kg	

Drive		
Cardan shaft PTO	540 1/min	

Recommended Towing Vehicle		
Recommended power	30 kW (40 HP)	Cardan shaft PTO 540 1/min
Supply control unit	25 A fuse	